


Instructions For Use

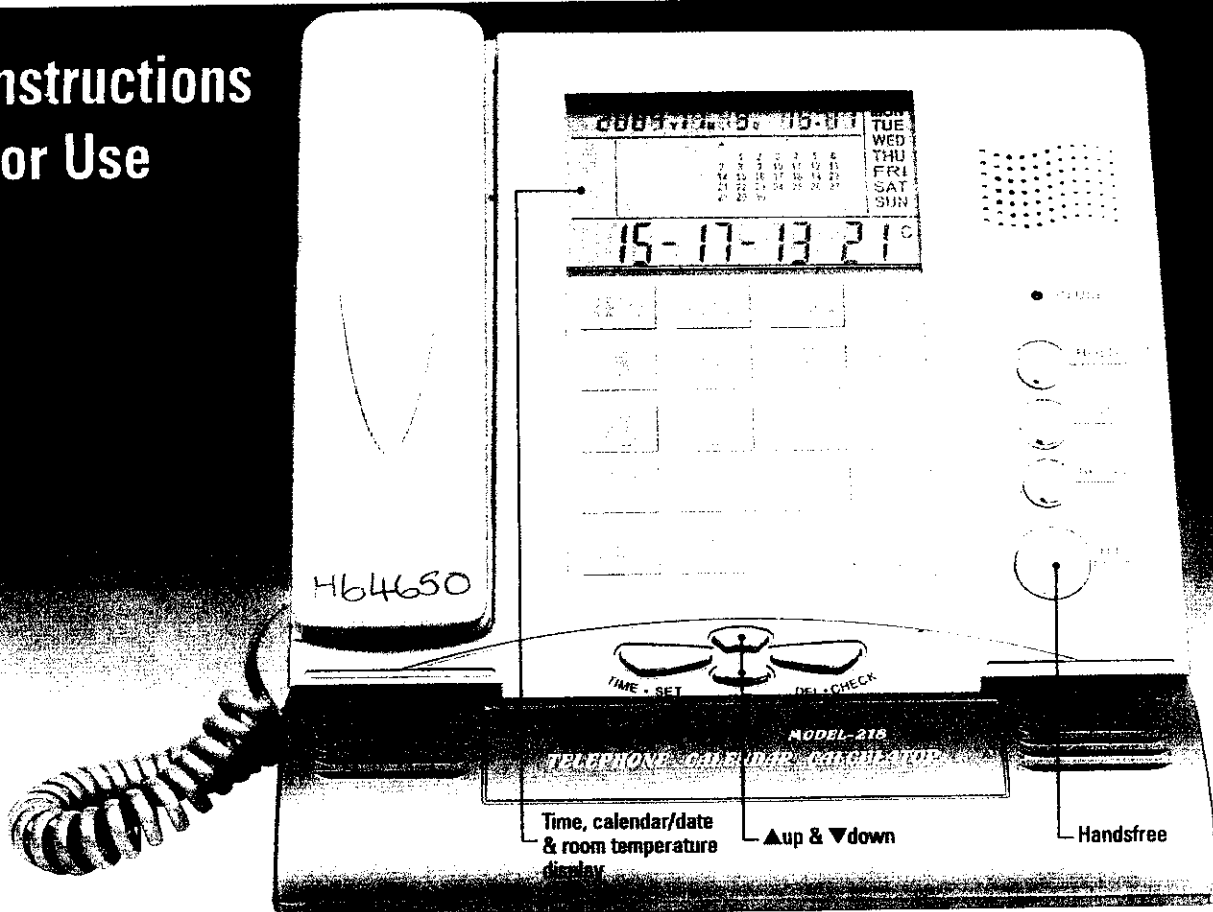

- Simply plug in to your telephone socket
- FSK/DTMF(Touch/ Pulse) dual system compatible
- Incoming caller display
- Stores 70 Groups of incoming call information
- Stores 10 Groups of dialled numbers with call duration
- Transfers incoming call details to 30 Groups in memory (Directory)

- Large screen display
- Displays: Date, Second, Minute, Hour, Day, Month, Year, Room Temperature
- Gregorian Calendar cross-referenced for 200 years (1900-2099)
- Alarm Clock
- Calculator: 12 digit
- On-hook pre-dial and number clearing

- Hands Free (On hook) calls
- LCD screen
- Screen brightness adjustable (8 levels)
- IP1 & IP2(Important Person) Keys

Left unused for 15 seconds the telephone will always revert to the Clock, Calendar & Room Temperature display.

INSTALLATION

Ensure the two batteries (supplied) are inserted correctly in the battery compartment in base of Telephone. Connect to telephone socket.

The Touch-Panel tilts through stages to 45 degrees for better viewing. Lift panel from base and use the support for desired angle.

Set DATE: Hold down **TIME SET** key for 3 seconds. Use the delete key to advance through Year, Month, Day and time and then the up & down keys to adjust each. Store by pushing **SET** key.

Set Alarm: Press **ALM** (Alarm) panel. There are **three alarm settings available**. Push the **ALM** panel once, twice or three times to chose the required alarm setting. Press **Delete** button to enter alarm setting. The **HOURL** will start flashing, then press any of the 4 buttons: up (▲) or down (▼): or down/- or up/+, keys to adjust the **HOURL** time setting. Then press **Del-check** key once to set the minutes. Now the **MINUTES** is flashing, again use any of the 4 keys mentioned to adjust your **MINUTES** settings, then press **time set** once, and then press **ALM** once (if the required alarm is **ALM1**), then press any of the up/down keys to show the bell sign on the screen. The Alarm is now set on **ALARM1**. Repeat the above procedure for **ALM2** or **ALM3** to be set, pressing the **ALM** key twice (**ALM2**) or three times (**ALM3**). If you want to switch the alarm **OFF**, press **ALM** key once for **ALM1** & then press any of the up/down keys once to set the alarm to the **OFF** position. The **BELL** sign will disappear from the screen. A different alarm tone can be set for each of the 3 alarms by using the 0 - 9 keys.

Viewing incoming number: When telephone rings - callers number is automatically displayed on screen. Missed calls are shown by **'NEW'** flashing in screen. Use **up & down** buttons to scroll through all callers numbers.

To **DELETE** the record of all incoming telephone numbers - hold down delete key for 3 seconds.

To **REDIAL** any number shown in incoming caller list. Display the number in the screen and press **REDIAL** key.

To **view numbers previously dialled** press **'OUT'** key Then use the **up & down** keys to scroll through list dialled to show the number and duration of call.

To view incoming numbers press 'up' or 'down' keys to scroll through the list.

Brightness setting: Press (SET) for more than 3 seconds, and then release the (SET) button. If you press (SET) button once after the first press of 3 seconds, then you can set the **TIME** If you press (SET) button a second time after the first press of 3 seconds, you can set the **LOCAL AREA CODE** (Not UK). If you press (SET) button a third time after the first press of 3 seconds, then you can set the **LCD BRIGHTNESS**, and then the lower most line will display 'LCD8'. Press (UP) or (DOWN) to adjust **LCD BRIGHTNESS** from '1' to '8', according to your liking, Press (SET) after completion to exit.

IP1 & IP2 Keys (Important Person/Number Keys) Store your most dialled number against Key **IP1** & and your second most frequently dialled number against Key **IP2**. Press **IP1** Key and key in the number to be dialled - then press the 'store' button. Repeat process for key **IP2** for your second most dialled number.

When your important Person numbers are installed (as above), use of the **IP1 & IP2 KEYS** is as follows: Either lift handset from the hook or press **Handsfree** once, then touch either **IP1** or **IP2** panel to dial the stored number.

Touch **AC** panel to use keyboard as calculator. Usable in both on & off hook modes. If an incoming call is received while in use the LCD display will suspend the calculator display & show the incoming number.

At the conclusion of the call press **AC** touch panel to resume calculation.

PAUSE panel: for external UK use only when dialling abroad to 'pulse' telephones.

Use **HOLD** key to hold an incoming call * Remember it is necessary to register with BT\NTL to receive caller display information.

EASYBUY

Empress Park, Northam,
Southampton, Hants,
SO14 OHW
Tel: 023 80 248788